


TERMOMIX COMPACT MIXING VALVES AK AND A

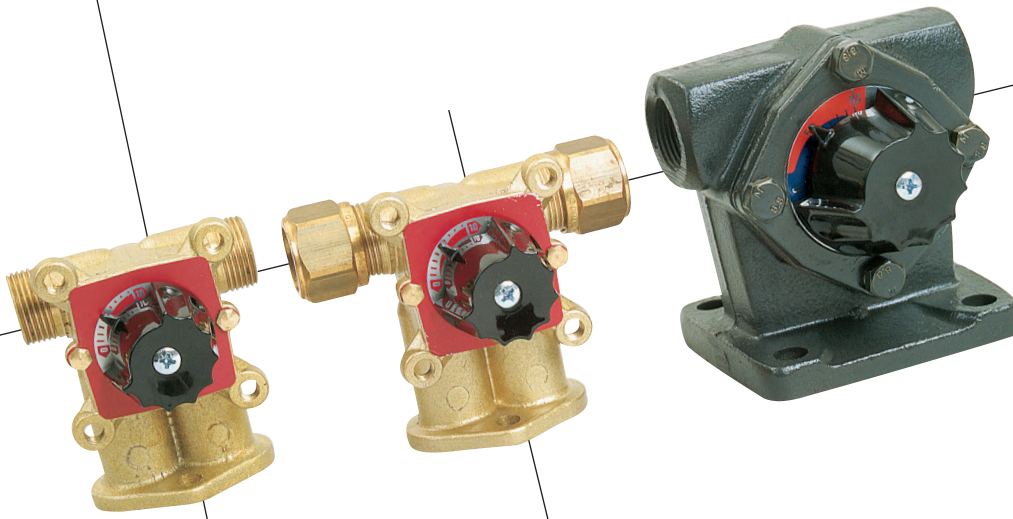

TECHNICAL DATA

	of brass	of cast iron
Max. operating temperature	110°C	110°C
Max. operating pressure	0,6 MPa (6 bar)	0,6 MPa (6 bar)
Angle of rotation	90°	90°
Torque	0,1 Nm	0,1 Nm
Valve body	Brass	Cast iron
Slide	Brass	Brass
Cover	Brass	Aluminium
Spindle	Brass	Brass
Spindle sealing	Two O-rings, EPDM	Two O-rings, EPDM
Motorizing	Suitable for all valves motors	Suitable for all valves motors

TERMOMIX A is a series of compact mixing valves for pre-fabricated mounting on heating boilers, heat exchangers and air heating/cooling applications. TERMOMIX A compact mixing valves have female or male threads or compression fittings. TERMOMIX valves have excellent control characteristics. They control both supply and return lines. The valves can be mounted in any position. TERMOMIX valves are very suitable for motorizing because of their low torque. The valves are available for right-hand or left-hand mounting.

ORDERING DATA

Order No.	Type		
2020	TERMOMIX A 20 A	G 3/4"	4-way mixing valve of brass with male threads
2512	TERMOMIX A 12 K	12 mm	4-way mixing valve of brass with compression fittings
2515	TERMOMIX A 15 K	15 mm	4-way mixing valve of brass with compression fittings
2518	TERMOMIX A 18 K	18 mm	4-way mixing valve of brass with compression fittings
2519	TERMOMIX A 19 K	19,1 mm	4-way mixing valve of brass with compression fittings
2520	TERMOMIX A 20 K	20,5 mm	4-way mixing valve of brass with compression fittings
2522	TERMOMIX A 22 K	22 mm	4-way mixing valve of brass with compression fittings
2220	TERMOMIX A 20 S	Rp 3/4"	4-way mixing valve of cast iron
2225	TERMOMIX A 25 S	Rp 1"	4-way mixing valve of cast iron
2232	TERMOMIX A 32 S	Rp 1 1/4"	4-way mixing valve of cast iron

LK ACASO AB
 Box 634
 SE-521 21 Falköping
 Tel: +46 515 107 50
 Fax: +46 515 590 30



E-mail: info@lkacaso.se
 Internet: www.lkacaso.se



LK Acaso


TERMOMIX COMPACT MIXING VALVES AK AND A

TERMOMIX AK 4-WAY MIXING VALVES

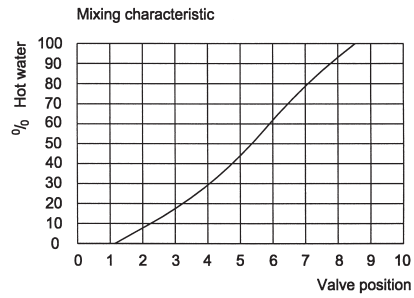
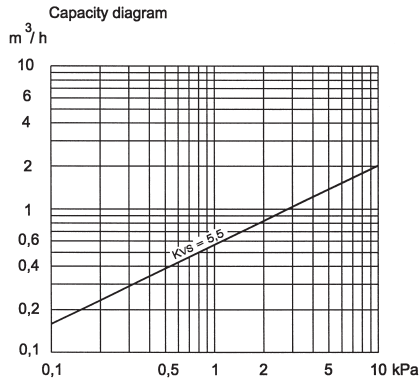


Order No.	Type	Kvs	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kg
2020*)	A 20 A	5,5	84	74	20 - G 3/4"	30	25	67	62	0,7
2512	A 12 K	5,5	117	74	12	30	25	67	62	0,9
2515	A 15 K	5,5	117	74	15	30	25	67	62	0,9
2518	A 18 K	5,5	117	74	18	30	25	67	62	0,9
2519	A 19 K	5,5	117	74	19,1	30	25	67	62	0,9
2520	A 20 K	5,5	117	74	20,5	30	25	67	62	0,9
2522	A 22 K	5,5	117	74	22	30	25	67	62	0,9

*) Outside threads, all others with compression fittings

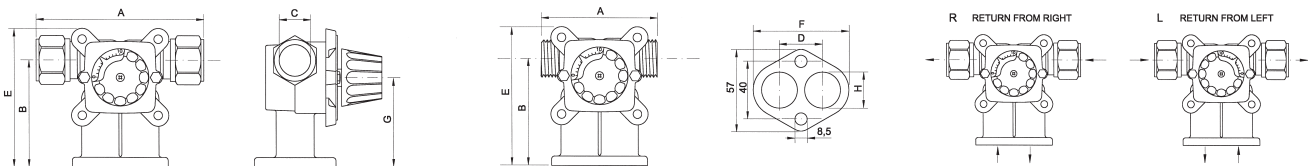

TERMOMIX A 4-WAY MIXING VALVES

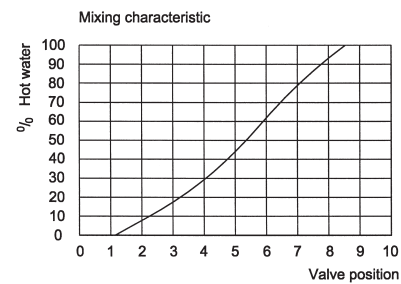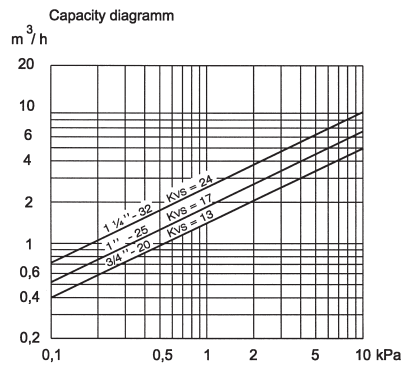

Order No.	Type	Kvs	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kg
2220	A 20 S	13	84	74	20 - Rp 3/4"	30	25	67	62	2,3
2225	A 25 S	12	117	74	25 - Rp 1"	30	25	67	62	2,6
2232	A 32 S	24	117	74	32 - Rp 1 1/4"	30	25	67	62	3,3

